



# ANSWER NEXGEN-FYRE™

## Small Stove with Heavy-Duty Construction

The Answer NexGen-Fyre™ is a beautiful small stove built with heavy-duty, high quality construction. This stove uses a five-sided convection chamber to distribute heat evenly throughout your home. Cool room air is naturally drawn around the hot firebox, heated, and returned back into room without using a convection fan. The Answer's™ 1.5 cubic foot firebox is large enough to hold an 18" log, offering longer burn times with less reloading. Alcove and Mobile Home approved.

### Options

- 160 CFM Convection Fan
- Outside Air Kit
- **GREEN START™** Igniter (See page 24)

### Specifications

- Emissions: 2.0 Grams Per Hour (CORD WOOD)
- Heating Capacity:\* Up to 1,400 sq. ft.
- EPA Tested BTUs: 12,129 to 59,527 (CORD WOOD)
- "Real World BTUs":\*\* See Below
- Maximum Burn Time: Up to 8 Hours
- Firebox Size: 1.5 cu. ft.
- Maximum Log Size: 18"
- Weight: 300 Pounds with Legs
- Construction: 5/16" to 3/16" Steel Plate
- Overall Efficiency:\*\*\* Up to 72.4% HHV
- Glass Viewing Area: 135 Sq. In, 15-3/8"W x 8-7/8"


\* Heating capacity may vary depending on degree of home insulation, floor plan and ambient temperature zone of the area you live.

\*\*EPA tests to determine BTU output are achieved with a single load of wood at each burn rate. At home, you are likely to add more wood to your stove to maintain your desired comfort level. By the simple process of loading your stove with additional wood, you could achieve up to a 20% higher heat output than established during EPA testing.

\*\*\* Overall Efficiency as tested using B-415.1 using Cord Wood. HHV = High Heat Value.

NEXGEN-FYRE™ WOOD STOVES

### Clearances & Hearth Protection

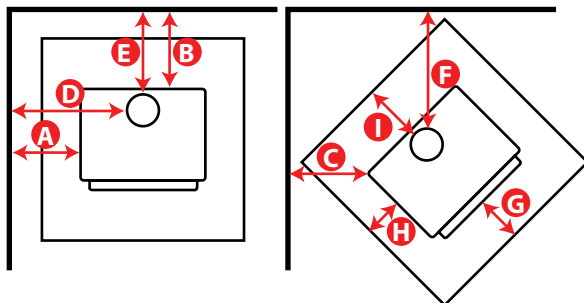

	Single Wall Connector	Double Wall Connector
A	18"	13"
B	16-1/2"	9"
C	10"	7-1/2"
D	27"	21-1/2"
E	19-1/2"	11-1/2"
F	19-1/2"	16-1/2"
	USA	CANADA
G	16"	18"
H	6"	8"
I	6"	8"