



## EVERGREEN NEXGEN-FYRE™ Premium Steel Wood Stove

The mid-sized Evergreen NexGen-Fyre™ hits the mark on performance, function and design. This sleek stove features gentle curved lines and complements any home's décor while artfully presenting heavy gauge steel, unibody construction and a cast iron door with a large, self-cleaning ceramic glass viewing area. The Evergreen's standard bypass damper gives you full control over the flow of smoke inside this stove, eliminating smoky startups and reloads.

### Options

- Outside Air Kit
- 400 CFM Convection Fan
- **GREEN START™** Igniter (See page 24)

### Specifications

- Emissions: 1.5 Grams Per Hour (CORD WOOD)
- Heating Capacity:\* Up to 2,000 sq. ft.
- EPA Tested BTUs: 12,772 to 70,720 (CORD WOOD)
- "Real World BTUs":\*\* See Below
- Maximum Burn Time: Up to 10 Hours
- Firebox Size: 2.2 cu. ft.
- Maximum Log Size: 20-1/2"
- Weight: 455 lbs w/Legs, 471 lbs w/Pedestal
- Construction: 1/4" to 3/16" Steel Plate
- Overall Efficiency:\*\*\* Up to 77.1% HHV
- Bypass Damper: Yes
- Glass Viewing Area: 183 Sq. In., 16-7/8" W x 10-7/8" H

\* Heating capacity may vary depending on degree of home insulation, floor plan and ambient temperature zone of the area you live.

\*\*EPA tests to determine BTU output are achieved with a single load of wood at each burn rate. At home, you are likely to add more wood to your stove to maintain your desired comfort level. By the simple process of loading your stove with additional wood, you could achieve up to a 20% higher heat output than established during EPA testing.


\*\*\* Overall Efficiency as tested using B-415.1 using Cord Wood. HHV = High Heat Value.



Pedestal Model

NEXGEN-FYRE™ WOOD STOVES

### Clearances & Hearth Protection

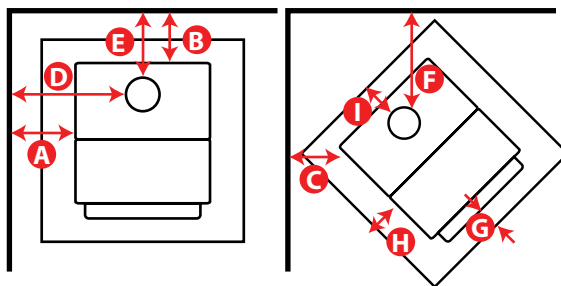

	Single Wall Connector	Double Wall Connector
A	19"	10-1/2"
B	17"	9"
C	8"	4"
D	22-1/2"	21"
E	8"	4"
F	17-1/2"	13-1/2"
	USA	Canada
G	16"	18"
H	6"	8"
I	6"	8"